


E-drive Driving System



Hospital Bed & Heavy Duty Castor wheels

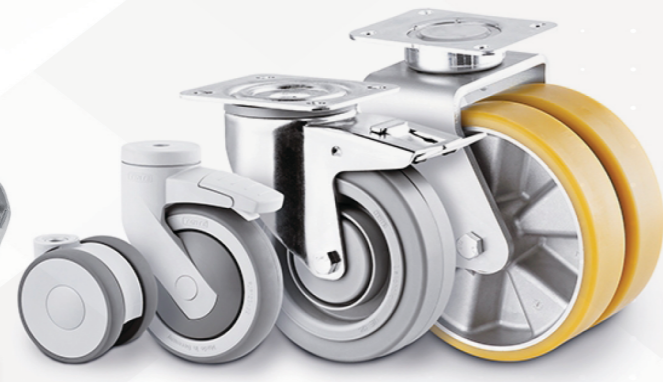

DABE100-165S-SAS



GRDE-102S-MCNY-TL



GHKE-42R-SZS


HEAVY DUTY
Caster Wheels



Cushion Support.
Leveling Caster Wheel



Gate and Track Roller.
Designed for Inverted Track



Medium-heavy Duty.
Spring-loaded w/ Dampener



Scaffolding Castor Wheels



www.castorwheel.com

PT. KASTOR & WHEEL INDONESIA
Blok B/1 Pergudangan Bizpark 2 Penggilingan
Jl. Raya Penggilingan No. 10 Kel. Penggilingan
Kec. Cakung
Tlp. 021-29061942, 085211385886
Fax. 021-29061941
Email : indonesia@castorwheel.com

PT BATAM RODA JAYA
Komplek Batamas Trikarsa Ekuallita
(Ruko Pasir Putih) Blok N No. 9 Batam Centre
Tel: (778) 748 3556 / 748 3557 / 609 2700
Fax: (778) 748 3558
Email: batam@castorwheel.com



KYUNG CHANG CASTERS

**A RELIABLE
& TRUSTED**

KOREAN PRODUCT



20



Pressed Steel Frame Heat Treatment And Zinc Galvanized. Swivel Double Ballrace Constructed With Precision Steel Ball



PU GREY/PVC RED 56 ~ 140 KGS

PVC - 50mm & 63mm PU red on nylon core Plain bearing (without threadguards)
PU-PVC - 75 ~ 125mm PVC Red or PU Grey on nylon core Ball bearing (with plastic threadguards)
Hardness: 94± Shore A • Temperature Range: -20°C to +80°C



PP BLACK/NL WHITE 80 ~ 125 KGS

NL Nylon White - Plain Bearing
• Temperature Range: -35°C to +100°C

PP Polypropylene Black - Plain Bearing
• Temperature Range: -20°C to +80°C

Hardness: 100± Shore A
Suitable for carpet floors, abrasive, impact, water & chemical resistance



INF 100 ~ 120 KGS

Infinity rubber 75 ~ 125mm (non-marking grey)
Nylon core annular bearing with metal threadguards
Hardness: 65± 3 (Shore A)
Temperature Range: -20°C to +80°C



	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
Swivel											
1020S-A1-PVC	65x48	54x24	6	64	20	50	25	6	28	≡	56
2025S-A1-PVC	70x60	53x42	8	86	24	64	30	8	35	≡	60
2030S-A1-PVC	92x60	73.2x44	M8	108	76	76	32	10.1	40	6000	100
2040S-A1-PVC	92x60	73.2x44	M8	130	89	102	32	10.1	40	6000	130
2050S-A1-PVC	92x60	73.2x44	M8	156	102	127	32	10.1	40	6000	140
Rigid											
1020R-A1-PVC	65x48	54x24	6	64	Rigid	50	25	6	28	≡	56
2025R-A1-PVC	70x60	53x42	8	86	Rigid	64	30	8	35	≡	60
2030R-A1-PVC	92x60	73.2x44	M8	108	Rigid	76	32	10.1	40	6000	100
2040R-A1-PVC	92x60	73.2x44	M8	130	Rigid	102	32	10.1	40	6000	130
2050R-A1-PVC	92x60	73.2x44	M8	156	Rigid	127	32	10.1	40	6000	140
Side-Brake											
1020S-A1-PVC-SB	65x48	54x24	6	64	20	50	25	6	28	≡	56
2025S-A1-PVC-TB	70x60	53x42	8	86	24	64	30	8	35	≡	60
2030S-A1-PVC-TB	92x60	73.2x44	M8	108	76	76	32	10.1	40	6000	100
2040S-A1-PVC-TB	92x60	73.2x44	M8	130	89	102	32	10.1	40	6000	130
2050S-A1-PVC-TB	92x60	73.2x44	M8	156	102	127	32	10.1	40	6000	140
Total-Lock											
2030S-A1-PVC-TTL	92x60	73.2x44	M8	108	76	76	32	10.1	40	6000	100
2040S-A1-PVC-TTL	92x60	73.2x44	M8	130	89	102	32	10.1	40	6000	130
2050S-A1-PVC-TTL	92x60	73.2x44	M8	156	102	127	32	10.1	40	6000	140
Swivel											
2030S-A1-NL	92x60	73.2x44	M8	108	76	76	32	10.1	40	—	105
2040S-A1-NL	92x60	73.2x44	M8	130	89	102	32	10.1	40	—	122
2050S-A1-NL	92x60	73.2x44	M8	156	102	127	32	10.1	40	—	125
2030S-A1-PP	92x60	73.2x44	M8	108	76	76	32	10.1	40	—	080
2040S-A1-PP	92x60	73.2x44	M8	130	89	102	32	10.1	40	—	110
2050S-A1-PP	92x60	73.2x44	M8	156	102	127	32	10.1	40	—	115
Rigid											
2030R-A1-NL	92x60	73.2x44	M8	108	Rigid	76	32	10.1	40	—	105
2040R-A1-NL	92x60	73.2x44	M8	130	Rigid	102	32	10.1	40	—	122
2050R-A1-NL	92x60	73.2x44	M8	156	Rigid	127	32	10.1	40	—	125
2030R-A1-PP	92x60	73.2x44	M8	108	Rigid	76	32	10.1	40	—	080
2040R-A1-PP	92x60	73.2x44	M8	130	Rigid	102	32	10.1	40	—	110
2050R-A1-PP	92x60	73.2x44	M8	156	Rigid	127	32	10.1	40	—	115
Total-Lock											
2030S-A1-NL-TTL	92x60	73.2x44	M8	108	76	76	32	10.1	40	—	105
2040S-A1-NL-TTL	92x60	73.2x44	M8	130	89	102	32	10.1	40	—	122
2050S-A1-NL-TTL	92x60	73.2x44	M8	156	102	127	32	10.1	40	—	125
2030S-A1-PP-TTL	92x60	73.2x44	M8	108	76	76	32	10.1	40	—	080
2040S-A1-PP-TTL	92x60	73.2x44	M8	130	89	102	32	10.1	40	—	110
2050S-A1-PP-TTL	92x60	73.2x44	M8	156	102	127	32	10.1	40	—	115
Swivel											
2030S-A1-INF	92x60	73.2x44	M8	108	76	76	32	10.1	40	Annular	100
2040S-A1-INF	92x60	73.2x44	M8	130	89	102	32	10.1	40	Annular	110
2050S-A1-INF	92x60	73.2x44	M8	156	102	127	32	10.1	40	Annular	120
Rigid											
2030R-A1-INF	92x60	73.2x44	M8	108	76	76	32	10.1	40	Annular	100
2040R-A1-INF	92x60	73.2x44	M8	130	89	102	32	10.1	40	Annular	110
2050R-A1-INF	92x60	73.2x44	M8	156	102	127	32	10.1	40	Annular	120
Side-Brake											
2030S-A1-INF-TB	92x60	73.2x44	M8	108	76	76	32	10.1	40	Annular	100
2040S-A1-INF-TB	92x60	73.2x44	M8	130	89	102	32	10.1	40	Annular	110
2050S-A1-INF-TB	92x60	73.2x44	M8	156	102	127	32	10.1	40	Annular	120
Total-Lock											
2030S-A1-INF-TTL	92x60	73.2x44	M8	108	76	76	32	10.1	40	Annular	100
2040S-A1-INF-TTL	92x60	73.2x44	M8	130	89	102	32	10.1	40	Annular	110
2050S-A1-INF-TTL	92x60	73.2x44	M8	156	102	127	32	10.1	40	Annular	120

40



Heavy steel welded construction Zinc plated, double ballrace swivel head. Dustproof seal heat treated ballrace ball



FM 120 ~ 240 KGS

Rubber foam-filled, grey - double ball bearing Pneumatic-air cushioning effect (non-puncture tyre). Extremely light-weight, quiet manoeuvre and skid-resistance
Temperature Range: -30°C to +80°C



NL 150 ~ 300 KGS

Made of Nylon-6 material (White) Non-marking. Double ball bearing
Temperature Range: -35°C to +100°C



PC 320 ~ 400 KGS

PC mold on polyurethane cast-iron centre (durometer: 90 ±5° Shore A) Round profile PU. Precision ball bearing with steel threadguards
Temperature Range: -30°C to +80°C

Swivel	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
4040S-A1-FM	100x114	71x84	M10	142	29	100	50	13	61	6202	120
4050S-A1-FM	100x114	71x84	M10	165	34	125	50	13	61	6202	160
4060S-A1-FM	100x114	71x84	M10	188	38	150	50	13	61	6202	200
4080S-A1-FM	100x114	71x84	M10	240	50	200	50	13	61	6202	240
Rigid											
4040R-A1-FM	100x114	71x84	M10	142	Rigid	100	50	13	61	6202	120
4050R-A1-FM	100x114	71x84	M10	165	Rigid	125	50	13	61	6202	160
4060R-A1-FM	100x114	71x84	M10	188	Rigid	150	50	13	61	6202	200
4080R-A1-FM	100x114	71x84	M10	240	Rigid	200	50	13	61	6202	240
Side-Brake											
4040S-A1-FM-TB	100x114	71x84	M10	142	29	100	50	13	61	6202	120
4050S-A1-FM-TB	100x114	71x84	M10	165	34	125	50	13	61	6202	160
4060S-A1-FM-TB	100x114	71x84	M10	188	38	150	50	13	61	6202	200
4080S-A1-FM-TB	100x114	71x84	M10	240	50	200	50	13	61	6202	240
Total-Brake											
4040S-A1-FM-TTL	100x114	71x84	M10	142	29	100	50	13	61	6202	120
4050S-A1-FM-TTL	100x114	71x84	M10	165	34	125	50	13	61	6202	160
4060S-A1-FM-TTL	100x114	71x84	M10	188	38	150	50	13	61	6202	200
4080S-A1-FM-TTL	100x114	71x84	M10	240	50	200	50	13	61	6202	240

Swivel	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
4040S-A1-NL	100x114	71x84	M10	142	29	100	50	D13	65	6203	200
4050S-A1-NL	100x114	71x84	M10	165	34	125	50	D13	65	6203	250
4060S-A1-NL	100x114	71x84	M10	188	38	150	50	D13	65	6203	300
4080S-A1-NL	100x114	71x84	M10	240	50	200	50	D13	65	6203	350
Rigid											
4040R-A1-NL	100x114	71x84	M10	142	Rigid	100	50	D13	65	6203	200
4050R-A1-NL	100x114	71x84	M10	165	Rigid	125	50	D13	65	6203	250
4060R-A1-NL	100x114	71x84	M10	188	Rigid	150	50	D13	65	6203	300
4080R-A1-NL	100x114	71x84	M10	240	Rigid	200	50	D13	65	6203	350
Side-Brake											
4040S-A1-NL-TB	100x114	71x84	M10	142	29	100	50	D13	65	6203	200
4050S-A1-NL-TB	100x114	71x84	M10	165	34	125	50	D13	65	6203	250
4060S-A1-NL-TB	100x114	71x84	M10	188	38	150	50	D13	65	6203	300
4080S-A1-NL-TB	100x114	71x84	M10	240	50	200	50	D13	65	6203	350
Total-Brake											
4040S-A1-NL-TTL	100x114	71x84	M10	142	29	100	50	D13	65	6203	200
4050S-A1-NL-TTL	100x114	71x84	M10	165	34	125	50	D13	65	6203	250
4060S-A1-NL-TTL	100x114	71x84	M10	188	38	150	50	D13	65	6203	300
4080S-A1-NL-TTL	100x114	71x84	M10	240	50	200	50	D13	65	6203	350

Swivel	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
4040S-A1-PC	100x114	71x84	M10	143	81	102	48	17	57	6203	320
4050S-A1-PC	100x114	71x84	M10	165	98	127	48	17	57	6203	360
4060S-A1-PC	100x114	71x84	M10	190	115	152	48	17	57	6203	380
4080S-A1-PC	100x114	71x84	M10	241	152	203	48	17	57	6203	400
Rigid											
4040R-A1-PC	100x114	71x84	M10	143	Rigid	102	48	17	57	6203	320
4050R-A1-PC	100x114	71x84	M10	165	Rigid	127	48	17	57	6203	360
4060R-A1-PC	100x114	71x84	M10	190	Rigid	152	48	17	57	6203	380
4080R-A1-PC	100x114	71x84	M10	241	Rigid	203	48	17	57	6203	400
Side-Brake											
4040S-A1-TB	100x114	71x84	M10	143	81	102	48	17	57	6203	320
4050S-A1-TB	100x114	71x84	M10	165	98	127	48	17	57	6203	360
4060S-A1-TB	100x114	71x84	M10	190	115	152	48	17	57	6203	380
4080S-A1-TB	100x114	71x84	M10	241	152	203	48	17	57	6203	400
Total-Brake											
4040S-A1-TTL	100x114	71x84	M10	143	81	102	48	17	57	6203	320
4050S-A1-TTL	100x114	71x84	M10	165	98	127	48	17	57	6203	360
4060S-A1-TTL	100x114	71x84	M10	190	115	152	48	17	57	6203	380
4080S-A1-TTL	100x114	71x84	M10	241	152	203	48	17	57	6203	400

800



All stainless steel SUS-304 with heavy duty welded construction. Stainless steel double ballrace swivel head F&B, Bakery, Cold storage, Hospital and Hygienic Environment



NLX 280 ~ 350 KGS

Made of Nylon material (non-marking Grey) Round profile, stainless steel, double ball bearing 6202STS Temperature Range: -35°C to +100°C



PCX 280 ~ 350 KGS

Polyurethane tread bonded to polyolefin core Non-marking, double ball bearing 6202 STS Temperature Range: -20°C to +80°C Durometer: 90 ±5° Shore A

Swivel	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
801NLX 100-A1	100x114	71x84	M10	142.5	29	101	50	15	65	6202 STS	280
801NLX 125-A1	100x114	71x84	M10	165.5	34	126	50	15	65	6202 STS	300
801NLX 160-A1	100x114	71x84	M10	189	38	151	50	15	65	6202 STS	320
801NLX 200-A1	100x114	71x84	M10	241	50	202	50	15	65	6202 STS	350
Rigid											
802NLX 100-A1	100x114	71x84	M10	142.5	Rigid	101	50	15	65	6202 STS	280
802NLX 125-A1	100x114	71x84	M10	165.5	Rigid	126	50	15	65	6202 STS	300
802NLX 160-A1	100x114	71x84	M10	189	Rigid	151	50	15	65	6202 STS	320
802NLX 200-A1	100x114	71x84	M10	241	Rigid	202	50	15	65	6202 STS	350
Total-Brake											
803NLX 100-A1-TTL	100x114	71x84	M10	142.5	29	101	50	15	65	6202 STS	280
803NLX 125-A1-TTL	100x114	71x84	M10	165.5	34	126	50	15	65	6202 STS	300
803NLX 160-A1-TTL	100x114	71x84	M10	189	38	151	50	15	65	6202 STS	320
803NLX 200-A1-TTL	100x114	71x84	M10	241	50	202	50	15	65	6202 STS	350

Side-Brake	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
804NLX 100-A1-TB	100x114	71x84	M10	142.5	29	101	50	15	65	6202 STS	280
804NLX 125-A1-TB	100x114	71x84	M10	165.5	34	126	50	15	65	6202 STS	300
804NLX 160-A1-TB	100x114	71x84	M10	189	38	151	50	15	65	6202 STS	320
804NLX 200-A1-TB	100x114	71x84	M10	241	50	202	50	15	65	6202 STS	350

Swivel	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
801PCX 100-A1	100x114	71x84	M10	142	29	100	50	15	65	6202 STS	280
801PCX 125-A1	100x114	71x84	M10	165	34	125	50	15	65	6202 STS	300
801PCX 160-A1	100x114	71x84	M10	188	38	150	50	15	65	6202 STS	320
801PCX 200-A1	100x114	71x84	M10	240	50	200	50	15	65	6202 STS	350

Rigid	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
802PCX 100-A1	100x114	71x84	M10	142	Rigid	100	50	15	65	6202 STS	280
802PCX 125-A1	100x114	71x84	M10	165	Rigid	125	50	15	65	6202 STS	300
802PCX 160-A1	100x114	71x84	M10	188	Rigid	150	50	15	65	6202 STS	320
802PCX 200-A1	100x114	71x84	M10	240	Rigid	200	50	15	65	6202 STS	350

Total-Brake	mm	mm	mm	mm	mm	mm	mm	mm	mm	bearing	Load kgs
803PCX 100-A1-TTL	100x114	71x84	M10	142	29	100	50	15	65	6202 STS	280
803PCX 125-A1-TTL	100x114	71x84	M10	165	34	125	50	15	65	6202 STS	300